



SWRB9

Water Resistant Roof Cargo Carrier

FITTING & GENERAL INSTRUCTIONS

Please note: This Cargo Carrier is not for use with vehicles with cross bars on the roof rails.


1. Inspect Cargo Carrier for any missing straps and for damage to the buckles.

Straps must be free from tears and buckles must be free from cracks.

2. Position the front of the cargo carrier in the same forward direction as the front of the vehicle. The front of the cargo carrier is the sloped area without the zipper. Before fitting the Cargo Carrier it is recommended to clean the roof of dust, dirt & grease.

3. Carefully place the cargo carrier onto top of the vehicle with the grey side down. Always place the cargo carrier in the centre of the vehicle roof rails.

4. Open the pack and proceed to load your items. Ensure that no sharp objects are placed near the bottom of the Cargo Carrier.

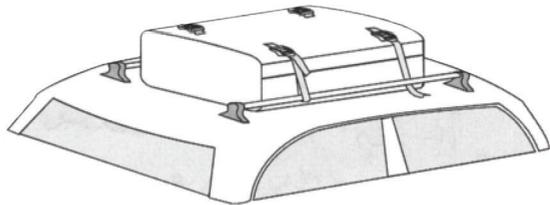

WARNING! Do not exceed the weight limit of your vehicle's roof. Consult the vehicles manual to find maximum weight limit (not more than 30kgs).

Once packing is complete you can now secure straps to the vehicle:

- Run one end of strap under the rail and back to the buckle.
- See Fig.2 for attaching strap to buckle
- Tighten straps equally on all four sides.
- Tie off the ends of all the straps to avoid any possibility of the straps slipping through the buckles.



CAUTION! Do not pull the straps to the point where the buckle may break. Once all buckles have been secured, check the Cargo Carrier is secure by moving it forward and back and side to side. If cargo carrier can be easily moved continue to tighten the straps until movement has minimized.

PLEASE NOTE: THIS ITEM IS NOT 100% WATERPROOF, IF ADVERSE WEATHER IS FORECAST WHILST YOU ARE USING THE CARGO CARRIER. IT IS RECOMMENDED TO COVER IT WITH A WATERPROOF COVER OR TARPAULIN.

Please read these instructions carefully before fitting.



STORAGE INSTRUCTIONS:

1. After use do not leave the Roof Cargo Carrier attached to the vehicle.
2. Do not fold the Roof Cargo Carrier for storage until it is fully dry.

WARNING: Do not put sharp objects inside the Roof Cargo Carrier.

IMPORTANT INFORMATION:

The Roof Cargo Carrier will carry up to 30kg. However these weights maybe in excess of the maximum roof carrying weight of some vehicles, especially smaller cars, it is essential therefore, that you check your vehicle handbook or manufacturers recommendations to ensure that the load, including the Roof Cargo Carrier itself, does not exceed this limit.

Loading the Roof Cargo Carrier to a weight in excess of the vehicles maximum roof load capacity may damage the vehicles roof.

Always ensure that loads are securely attached and do not over hang as this may become dangerous and cause accidents with other motorists.

Once the vehicle is in motion the airflow will try to lift the front of any load, so it is essential that a secure fixing is made, holding the front of the load down is most important (extra straps may be required - not provided).

Routinely check all fixings to ensure the 'Roof Cargo Carrier' AND the load is tightly secured. Don't forget the extra height when using the 'Roof Cargo Carrier' and take care e.g. when entering covered car parks etc.

Always distribute weight evenly and safely. If in doubt, it is recommended carrying a load, including the rack of no greater than 30kg.

Streetwize Accessories accept no responsibility for any damage to vehicle, loss of load or personal injury if the "Roof Cargo Carrier" has not been fitted in accordance with the instructions and vehicle weight recommendations.

Streetwize Accessories:

Unit 1, Royce Trading Estate, Ashburton Road West,
Trafford Park, Manchester M17 1RY

Sales enquiries: sales@streetwizeaccessories.com

Technical enquiries: support@streetwizeaccessories.com

www.streetwizeaccessories.com