



12V 300 Amp (Peak) Emergency Jumpstarter & Portable Power Bank

SWPB2

Information For Use

8000 mAh Battery Capacity

300 AMP (Peak) | 12V

150 AMP
(Continuous)



Emergency Jumpstarts

Petrol Engines: Up to 2000cc (2.0L)

Diesel Engines: Up to 1600cc (1.6L)

Manual Contents

Intention for Use	3
Product Elements	3
On First Use	4
Charging the Unit	4
<i>Charging Via The Mains</i>	4
<i>Charging Via 12V Socket</i>	4
Performing Emergency Jumpstarts	5
<i>Functionality of Smart Jumpstart Cables</i>	5
Charging Smartphones & Tablets	6
<i>Charging smartphones, tablets and other USB devices</i>	6
LED Torch	7
Health & Safety Warnings	7
Manufacturer's Warranty	8
Technical Support	8
Technical Specifications	8


Intention for Use

Thank you for purchasing the 12V 300 Amp (Peak) Emergency Jumpstarter & Portable Power Bank from Streetwize. This powerful piece of kit can jumpstart 12V vehicles with petrol engines up to 2.0L and diesel engines up to 1.6L.

This product also acts as a robust power bank that can provide hours of portable power for smartphones, tablets and other USB devices.

Product Elements

1. Streetwize 12V 300 Amp (Peak) Emergency Jumpstarter & Portable Power Bank
2. 12V DC Socket Charger
3. 230V AC Mains Charger
4. 3-in-1 USB cable with Type C, Micro USB and Lightning Adapters
5. Smart Jump Start Cables

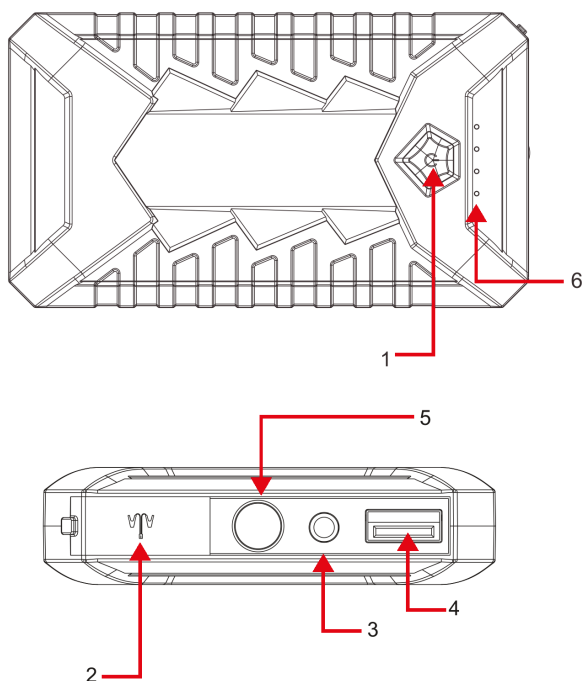

- | | | |
|---|-----------------|------------------------|
| 1. Power button | 3. 15V/1A input | 5. Flashlight |
| 2. Battery terminal socket for the jump start | 4. 5V/2A output | 6. LED indicator light |

On First Use

Before using this product, we highly recommend that you charge the unit for at least 3 hours. We also advise that you keep the power bank fully charged whenever possible.

Important: This product is able to jump start vehicles when the LED indicator lights near the power is showing at least 3 lights. However, for optimum performance, we advise that you fully charge the unit until the LED indicator display shows all four lights.

Never perform an emergency jump start when this unit's LED battery indicator is showing less than 3 LED lights as this may lead to damage to the product, or cause it to malfunction.

IMPORTANT – PLEASE NOTE

This product provides a peak output of 400Amps. Please note that the peak output lasts for a very limited amount of time. The peak output will only activate if you are jumpstarting engine sizes that exceed the specifications on the front of this manual, so please ensure you are jumpstarting the correct engine size for this product.

Charging the Unit

This unit comes supplied with two charging cables, a 230V AC mains charging cable and 12V DC charging cable.

Charging Via The Mains

With the 230V AC mains charging cable, connect the cable to the Input 15V/1A socket on the unit. Then connect the cable to your mains supply and switch on the mains. Charge until the digital display shows 100%. See figure 1.

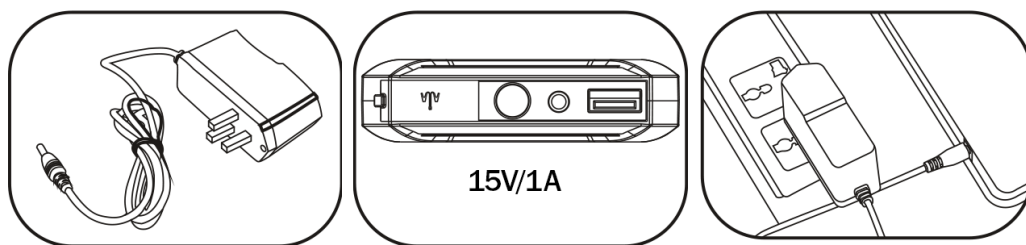


Figure 1

Charging Via 12V Socket

Using the 12V charging cable, as before, connect the cable to the Input 15V/1A socket on the unit. Then connect the cable to your vehicle 12V socket, and then turn your vehicle on to commence charging. Charge until the digital display shows 100%.

Important: Use the mains charging option as the primary method of charging this power bank. The 12V charging option should be used as a secondary option as this will risk depleting your vehicle's battery.

Performing Emergency Jumpstarts

To perform an emergency jumpstart, please follow the instructions below:

1. Take the smart jumpstart cables and connect it to your vehicle's 12V battery terminals. Connect the RED cable to the positive terminal FIRST, then connect BLACK cable to the negative terminal SECOND. Make sure the clips are well-connected to the battery terminals.

Caution: Never connect the red & black crocodile clips together at the same time.

2. Then, connect the smart jumpstart cables to the unit. You should see a Green LED light appear on the smart jumpstart cable's terminal followed by a single beep sound to confirm correct connectivity.
3. Place the unit on a steady surface under the bonnet.
4. Attempt to start your vehicle's engine. DO NOT attempt to start the engine for more than 4 seconds. The vehicle's engine should start immediately. If it doesn't, turn off the engine and wait for at least 15 seconds
5. Once the engine has been ignited, immediately unplug the battery cable adaptor from the unit first, and then remove the crocodile clips from the battery. Then, place everything back into its carry case.

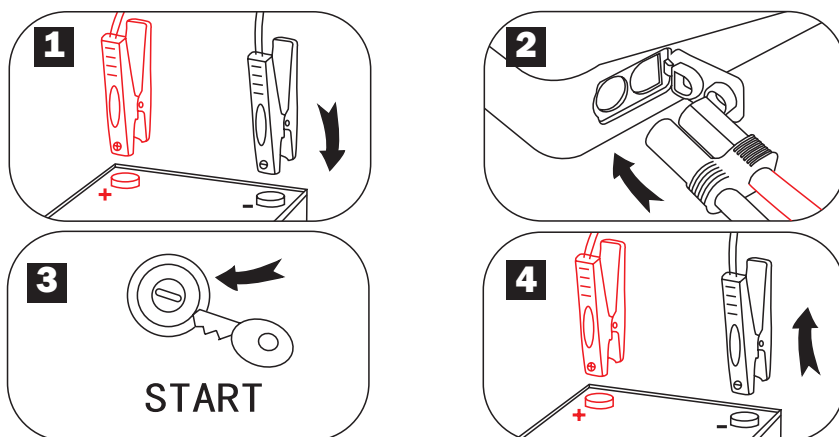


Figure 2

Please note: The unit will NOT be able to perform an emergency jumpstart if the vehicle has a voltage rate above 12.3V. If the vehicle does not start, this may indicate another problem and we advise that you get your vehicle checked by a qualified mechanic or professional.

Functionality of Smart Jumpstart Cables

The included smart jumpstart cables come with an LED indicator that displays either a red or green light and it also comes with a warning sound.

LED Light / Sound	Meaning
Soild Red LED with 2 short beeps	Reverse polarity connection
Solid Red LED with 1 long beep (high frequency)	Short-circuit protection
Solid Red LED with 1 long beep (low frequency)	Overheat protection
Solid Red LED with 2 short beeps	Over-discharging protection
Green/Red LED flashing	Searching for status connection
Green LED	Correct connection after one beep



Charging Smartphones & Tablets



This unit comes with a single USB charging port (5V/2Amp) and a single input 15V/1Amp.

IMPORTANT: Do not charge the unit and charge an electronic device at the same time. This will shorten the power bank's battery life.

Charging smartphones, tablets and other USB devices

1. Connect the provided 3-in-1 USB charging cable plug into the 5V/2A USB output port.
2. Insert the correct adaptor for the device to be charged.
3. When the cable is connected Press the "On" button once to commence charge.
4. Press the "Power" button once to commence charge. Unplug when the device has been charged.

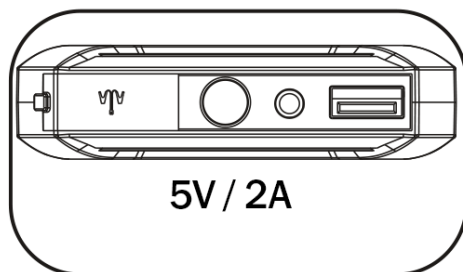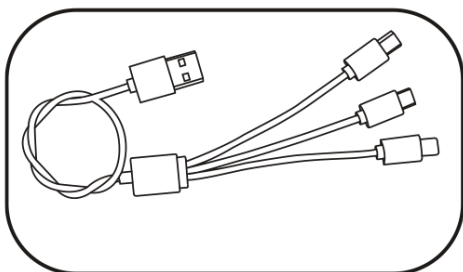


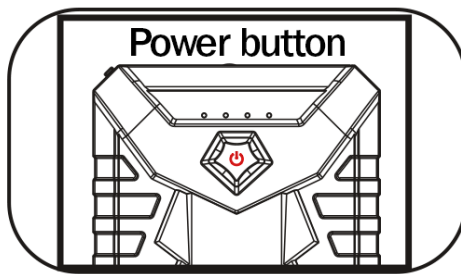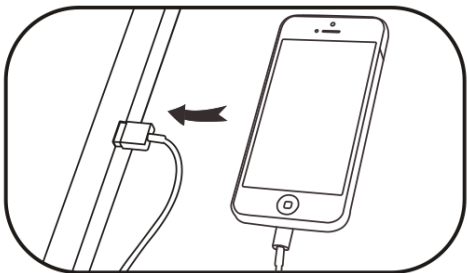

LED Torch

To turn on the LED torch, press and hold the “On” button to turn on the LED torch. Then, press again to select either SOS FLASHING or STROBE (fast) mode.

Press the “On” button again to switch off.

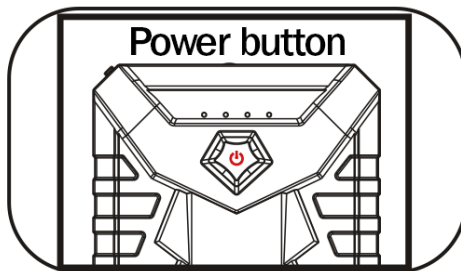

Health & Safety Warnings

- The power bank will generate heat when charging. Charge in a well-ventilated area. Keep the power bank away from heat sources, direct sunlight, humidity, water or other liquids.
 - Do not operate the power bank if it is wet or damaged to prevent electrical shock, explosion and/or injury. Improper repairs of this device may place the user at risk.
 - Do not use the power bank with wet hands. Do not use this unit for anything other than its intended use.
 - The power bank is not a toy. Keep out of reach of children.
 - Do not charge under pillows, blankets or any other fabric.
 - Do not store in a car during hot weather.
 - Short-circuiting a Li-ion battery can cause it to ignite or explode.
 - Never open a Li-ion battery's casing. Li ion batteries contain safety devices that protect the cells inside from abuse, if damaged these can cause the battery to ignite or explode.
 - DO NOT use or store at temperatures above 50°C or below -10°C
 - Do not charge the power bank and charge an electronic device at the same time. This will shorten the power bank's battery life.
-

Technical Support

If you require any technical support within the warranty period, please contact us on support@streetwizeaccessories.com and provide product name and supplier code (see Technical Specifications) along with the technical query and proof of purchase.

Technical Specifications

Product	Streetwize 12V 300 AMP (Peak) Emergency Jumpstarter & Portable Power Bank
Product Code	SWPB2
AC/DC Input	230V AC & 12V DC
Input	15V/1Amp
USB Output	5V 2Amp
Output Current	12V/150 Amp (Continuous)
Output for Jumpstart	12V/300 Amp (Peak)
Capacity	8000mAh
LED Saving	1Watt
Operating temp	-10°C to +50°C
Cycle life	1000 recharges
LED life	50,000 hours
Charging Time	Around 4 hours
Size	140mm x 79mm x 19mm



Streetwize: Ashburton Road West, Trafford Park, Manchester M17 1RY

www.streetwizeaccessories.com

For Product Support:

E: support@streetwizeaccessories.com

T: +44 (0)161 447 8597

For Trade Enquiries:

E: sales@streetwizeaccessories.com

T: +44 (0)161 447 8580

EU Registered address: **Ace Supply Co (Europe) Ltd.** 25 Herbert Place, Dublin 2, D02 A098 Republic of Ireland.