

Airbreak 8000 (Single point inflation)

READ THE INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY AND INSTALLATION



Before Use

When you first receive your Airbreak check the following is included to avoid inconvenience when fitting the awning.

Airbreak	1
Airbreak Peg Bag	1
Pump	1
Airbreak carry-bag	1


Assembly instructions:

DO NOT USE a knife to open the carton, the windbreak is packed tightly into the box, and it is very easy to cut through the cardboard and the item inside.


- 1 Ensure the ground is free of stones and other sharp objects. Unpack and familiarise yourself laying the Airbreak flat on the ground.
- 2 Ensure the valve is securely tightened in, the Airbreak benefits from a single inflation Inflate the Airbreak until all the beams are firm. Do not over inflate your wind break.

We recommend that you inflate the windbreak:

Spring time up to 23 degrees 7Psi, Summer 23degrees + 5Psi.

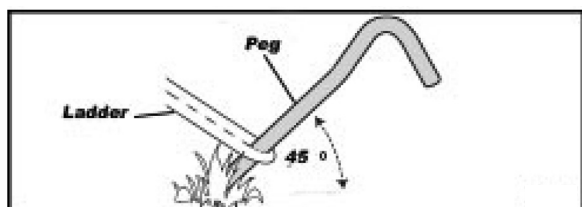

- 3 Once you are happy proceed position as required an to peg out using the eyes along the base and the guys provided.

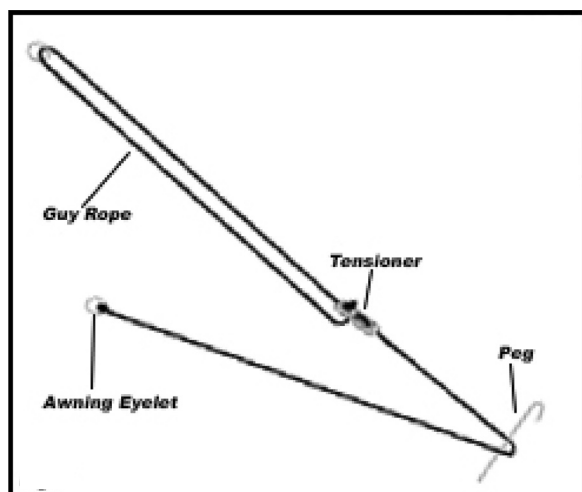

- 4 Finally using the guy ropes provided ensure all of these are pegged out as this will give the required stability.

Dismantling

To dismantle the Airbreak 8000, simply reverse the erection procedure.

The beams must be deflated and the Airbreak 8000 should be carefully rolled and dry prior to placing back in the carry-bag.

Note: please ensure that all the valves have been released when deflating the Airbreak.

Beam leakages

Should you experience beam failure, at any point these are easily replaceable, simply remove the securing 'C' clip and unscrew the valve and remove the white air pipe, replacements are available from your supplier.

**Leisurewize, a brand of the Ace
Supply Company Ltd. (Streetwize)**
Suite GA, Marsland House
Marsland Road, Sale M33 3AQ

For Product Support:
support@leisurewize.com

EU Regd. Address:
Ace Supply Co (Europe) Ltd.,
Dublin 2, D02 A098, ROI

WWW.LEISUREWIZE.COM