

GW565



Solar Water Feature Vase with Battery Back-up

Information for use _____



Thank you for purchasing
this Solar Water Feature
Vase from Streetwize
Garden.

Please read through all the
information in this document
and keep it for future
reference.



Instructions For Use

This solar pump is for outdoor use. For the solar pump to operate, the solar panel needs to be in direct sunlight.

This solar pump has a backup battery pack, and it is controlled via a switch on the control box. This will allow the pump and LED lights to work in the evening. Please note that the evening runtime will vary depending on the charge level of the battery and weather conditions.

PLEASE NOTE: For best results, allow the solar panel to charge the battery 24-48 hrs in direct sunlight before using the pump.

Assembling Your Product

1. Unpack all components carefully.
2. Connect the pump cable to the socket of the control box on the rear side of the solar panel. (Fig.1). Make sure to put the solar panel in direct sunlight.
3. Connect the light cable to the light socket of pump (Fig. 2).
4. Fill the fountain with fresh water.
5. Place the pump underwater and make sure that, it is fully immersed in water.
6. The solar water feature is now ready to use.

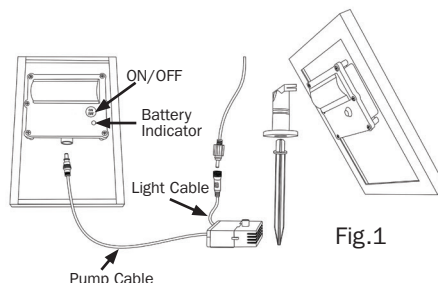


Fig.1

Operating The Pump

ON: Press the switch on the control box once to turn on. The pump will run until the battery power runs out. The battery then enters the charging state. The pump will start automatically once it has sufficient charge.

OFF: Press the switch on the control box to turn off.

Battery Indicator Light & Status

When the battery is fully charged and without any sunlight input, pump will run around 6-8 hours. With strong sunlight input, could run for more than 8 hours.

Green: battery is full charged (81%~100%).

Orange: battery is partially charged (20%~80%).

Red: battery requires charging (below 20%). The pump will stop operating.

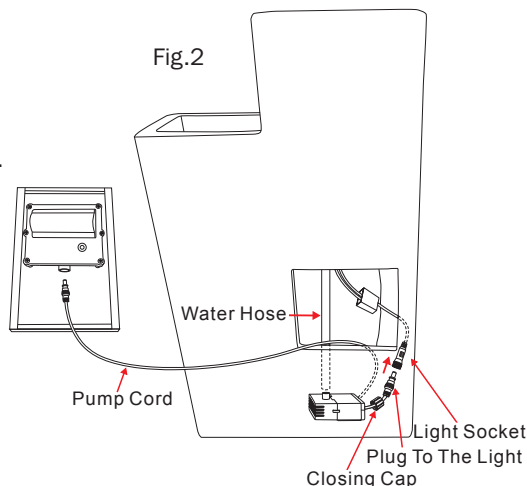


Fig.2


Safety Warnings

1. For safety reasons, please do not remove or change any components in the water feature. Doing so will invalidate your guarantee.
2. Do not hang the solar panel upside down, use something waterproof to plug the jack when the jack is not use.
3. Do not connect the pump to AC power source. It is only for use with DC power.
4. Use fresh water only.
5. Do not use with flammable liquids.
6. Take care not to damage the solar panel.
7. Do not use in water above 35°C.
8. Do not let the pump run dry.

Cleaning and Maintenance

Pump

If the pump stops working or is running slow, you will need to disassemble and clean the pump to remove any debris/limescale from the filter and motor chamber, as shown in Fig. 3.

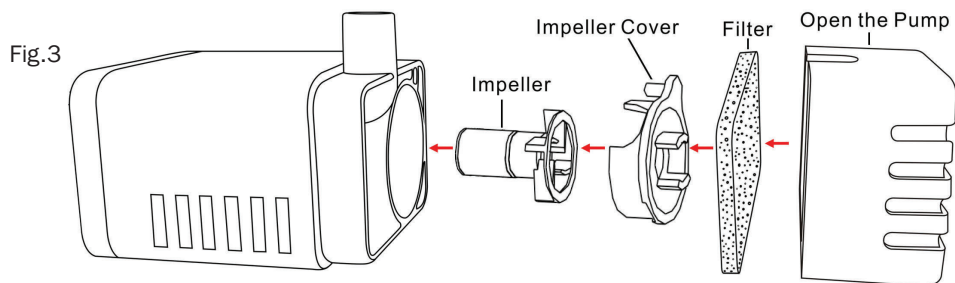





To disassemble the pump, ensure the unit is switched off. Remove the pump from the water hose and take the pump out of the water. Then, remove the pump cover, filter and impeller cover (Fig.3). Clean them with fresh water and place them back inside the pump.

Solar Panel

The solar panel should be cleaned with a soft cloth on a regular basis to maintain optimum efficiency.

Pump Performance In Different Weather Conditions

Weather	Pump On	Pump Off
	Battery runs the pump and full solar charges the battery. Pump performance is maintained when the clouds pass.	Battery should be fully charged in 1 day.
	Battery runs the pump and extra solar supplies extra energy to the battery. Performance is maintained when the clouds pass. Pump will only run a shorter period of time into the evening.	Battery will take 2 to 3 days to fully charge.
	Pump will only run when there is sufficient power from the battery. Little or no battery charging occurs so pump performance is not maintained.	Battery will take several days to fully charge.
	No solar power is available, the pump will not run and battery will not charge.	Battery will not charge.

Troubleshooting

Problem	Potential Cause	Pump Run Time
Pump not operating under full sunlight.	Pump is not connected to the solar panel. Impeller is blocked - to clean the pump, remove the front plate and the impeller. Use a small brush or fresh water to remove any debris.	Check connection to the solar panel. Remove blockage (see cleaning and maintenance).
Pump is operating but water is not running through the fountainhead.	Build-up of sediment or limescale inside the pump.	Clean tubes and filter (see Cleaning and Maintenance).

Storage

Ensure the battery is fully charged before storing and disconnecting all cables. We recommend the use of a cover to protect the water feature from dust/damage.

Technical Specification

Product name	Solar Water Feature Vase With Battery Back-up
Supplier Code	GW565
Lithium Battery	7.4V-2000mAh
Operation Voltage	6.3-7.8V DC
Water Flow Max	330-375LPH
Water Lift Max	1.0-1.3M
LED Light	2 x LED
Cable Length	5M
Solar Panel	4.5W 9V



Streetwize,
Suite GA, Marsland House,
Marsland Road, Sale M33 3AQ

For Product Support:
support@streetwize.co.uk

EU Regd. Address:
Ace Supply Co (Europe) Ltd.,
Dublin 2, D02 A098, ROI

www.streetwize.co.uk