



SWRB5

# Heavy Duty Anti-Theft Aluminium Universal Roof Bars



READ THE INSTRUCTIONS CAREFULLY BEFORE ASSEMBLY AND INSTALLATION

## Instructions For Use

*These roof bars support a maximum load of 75kg and come with an anti-theft locking mechanism for a secure fit and prevent the roof bars from being stolen.*

*Before installing the roof bars, we highly advise that you follow the instructions and health & safety guidance written in this manual to ensure the best practices are followed when installing and using these bars.*

*Designed For Use With Factory-Fitted Raised Roof Rails  
Max Load Weight: 75 Kg*

## Product List

- 2 x Streetwize Heavy Duty Aluminium Universal Roof Bars
- 1 x Allan Key
- 2 x security keys



## Roof Bar Installation Instructions

Attention: For health & safety and to prevent damage to vehicle's roof, we highly advise that two people are involved in fitting and removing these roof bars.

1. On removing the roof bars from its packaging, use the provided security keys to unlock the mounting bracket on both of the roof bars. When unlocking, you will notice the red guard moving to give you access to the Allan key hole.
2. When using the Allan key, the gripping arms on the roof bars will loosen, allowing you to position the bars on your vehicle's roof rails.



3. Mount the roof bars to your vehicle's roof rails, and use the Allan key to securely tighten the mounting bracket onto the roof bars.



**PLEASE NOTE:** When installing the roof bars, please ensure the mounting bracket is securely connected to the roof rails, as shown below (A). If roof bars are incorrectly mounted (as shown in B & C, this will risk destabilising the load, causing danger to other road users).



4. When positioning both roof bars on your vehicle's roof rails, please ensure that there is a minimum distance of 700mm (27.5") between the roof bars.



5. Once both roof bars have been mounted and correctly positioned, secure them with the security keys to cover the Allan key access with the red guard.






## How to Correctly Load onto Roof Bars

When loading onto the roof bars, ensure the load is evenly distributed from centre (B). Don't put most of the load to one side (A), as this will cause destabilisation, causing risk of danger to other motorists and road users. Also, please do not place a load that protrudes past the width of the roof.

When carrying load, we advise not to exceed the max. speed of 55 mph and that you use the appropriate number of quality tie down straps to secure the load in place. (Please do not use elasticated ropes.)

For longer loads, ensure you secure the ends of the load using a good quality buckle/ratchet or rope to the vehicle's bumper (C).

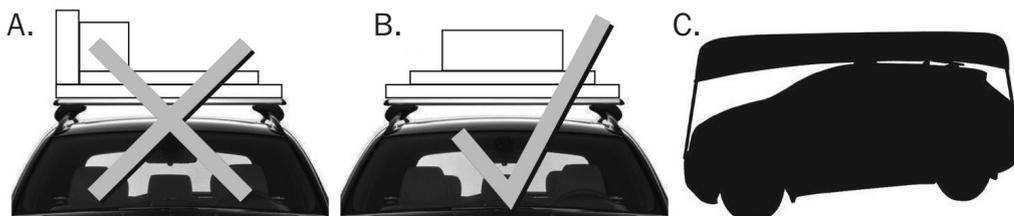

## Spare Parts

Should you require any replacement spare parts, please contact us on

[spareparts@streetwizeaccessories.com](mailto:spareparts@streetwizeaccessories.com)

and please provide the product name, supplier code (see Technical Specifications) and model along with the name of the part that needs replacing.

## Manufacturer's Warranty

This product comes with a 12 month manufacturer warranty which starts on the date of purchase. The warranty covers technical faults during the 12 month period. Any issues caused by accidental damage or wear and tear is not covered by this 12 month manufacturer warranty.

**For any warranty queries, please contact the retailer where you purchased the product.**

## Technical Specifications

<b>Product</b>	Streetwize Heavy Duty Aluminium Universal Roof Bars
<b>Supplier Code:</b>	SWRB4
<b>Max Load:</b>	75kg
<b>Roof Bar Width:</b>	120cm

## Health & Safety

- The maximum load for these roof bars is 75kg. Please do not exceed this limit.
- Please check with your vehicle manufacturer for the maximum load weight that it can take on its roof. Ensure that you do not exceed this load weight as it will cause damage to your vehicle's roof.
- After installing the roof bars, go for a short drive. After your drive, please check to see if the fittings are secure. This is essential. The roof bars should be regularly checked at regular intervals to ensure load safety.
- Special care must be taken when driving with load on the roof bars in heavy winds or when you are approaching bends or other road hazards. Also, refrain from accelerating and braking sharply.
- When braking when the roof bars are in use, please be mindful that vehicle braking distance will be longer than normal.
- It is essential to ensure the weight of the load is evenly distributed
- When securing your load on the roof bars, ensure that you use an adequate number of quality tie down straps. For longer loads, use either quality rope or tie down to secure to vehicle's bumpers.

ATTENTION: ALWAYS REMOVE THE ROOF BARS IF YOU ARE GOING TO USE A DRIVE-THROUGH CAR WASH.

NOTE: TO REDUCE FUEL CONSUMPTION, WE RECOMMEND REMOVING ROOF BARS WHEN NOT IN USE.