




Product Description

- A. On/Off switch
- B. Answer/end button
- C. Volume reduction
- D. Volume plus / private answer
- E. Micro USB charging connector
- F. Speaker

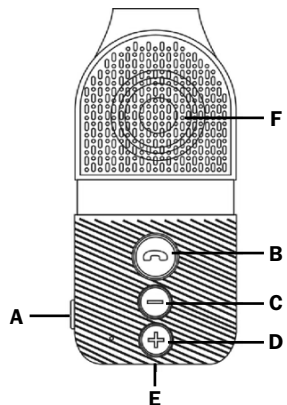

WHAT YOUR HANDS-FREE KIT CAN DO

- Answer/end calls
- Reject calls
- Voice dialling

- Announce calling number
- Last number redial
- Personal connectivity/speaker switch
- Adjust volume
- Transmit mobile music and directions from a GPS app from phone
- Connect to two Bluetooth® devices simultaneously

SPECIFICATIONS

- Talk time up to 17 hours
- Standby time up to 30 days (720hrs) approx
- Charging time approximately 2.5 hrs
- Digital sound enhancement via DSP technology
- Noise cancellation through DSP
- Echo cancellation through DSP
- A2DP (Advanced Audio Distribution Profile) for transmitting music, and directions from a GPS app on your phone
- Status Light (ready-to-pair, call/connection status)
- Size - H: 119 x W: 52 x D: 16 mm (approx)
- Weight: 64 grams
- Operating range up to 10 meters (approx 33 feet)
- Supported Bluetooth® profiles: HFP, HSP, A2DP
- Bluetooth® specification version 4.0
- Build-in digital amplifier for enhanced audio quality
- Rechargeable battery with charging option from car charger or USB cable

HOW TO USE BUTTONS

Instruction	Duration
Tap	Press briefly
Double tap	2 quick repeated taps
Press	1-2 seconds
Press and hold	6 seconds

WHAT THE LIGHT MEANS

Light Status (Answer/end call button)	Speakerphone status
Flashing in red and blue	Pairing mode
Light solid blue then goes into standby mode	Connected
Light flashes blue every 2 seconds	Standby/idle
Light flashes blue every second	Incoming call
Light turns solid blue	Active call
Light flashes red	There is less than 20 minutes talk time left
Light stays red	Unit is in charging mode

GETTING STARTED

Make sure that your hands-free kit speakerphone is fully charged for two hours before you start using it. Use the USB cable to connect to the car charger. Plug the car charger into your car's power socket. The status light will light up red while charging. When fully charged the status light turns off.



CONNECTING YOUR MOBILE PHONE:

1. Activate Bluetooth® from your mobile phone
2. Turn on your speakerphone - press the On/Off switch, device will be ready to pair with status light flashing in red and blue colour in turns.
3. Use your mobile phone to search Bluetooth® device with the name of 'E09' .
4. Your mobile phone will find E09, and will have options to connect or not. Please connect it with the password of "0000" (if needed). When you successfully connect it, the status light flashes in blue colour with a voice of 'phone 1 connected'.

CONNECTING YOUR PHONE AUTOMATICALLY

Pairing is only needed the first time. When the speakerphone and phone have been paired once, it will connect automatically in future. The speakerphone can register up to 8 mobile phones.

PAIR THE SECOND PHONE:

The speakerphone has advanced Multi-use function which allows to match two mobile phone at the same time. After the first mobile phone pairs successfully, turn it's Bluetooth® function off. Turn on the Bluetooth® of your second phone, search for E09 and connect. Then turn on the Bluetooth® of your first phone and connect E09, both phones are connected now.

PLACING SPEAKERPHONE DRIVE IN YOUR VEHICLE

The speakerphone sits discreetly and conveniently on the sun visor using the integrated magnet metal clip. The product can be easily taken on and off the sun visor. For optimal sound quality place the speakerphone right in front of you and speak directly into the speakerphone.

ADDITIONAL FEATURES

The device can also play music and transmit GPS directions from apps on your phone. Make sure that the speakerphone and mobile phone are connected. When you play music or GPS application directions from your mobile phone will automatically transfer to your speakerphone.

When you have an incoming call, the music or GPS application directions will automatically pause. When the call is ended it will start again.

EASY VOICE GUIDANCE

- Easy voice guidance informs you about your connection and low battery status.
- When the speakerphone automatically reconnects to existing mobile phones, you will hear 'phone one connected' or 'phone two connected'.
- Low battery is announced every 3 minutes when the speakerphone working time is less than 20 min.
- When there is a incoming call, the speakerphone will announce the incoming call number.

PERSONAL CONNECTIVITY FUNCTION

- When there is an incoming call, you can transfer the call to mobile phone via the personal connectivity switch. If press this button again, the incoming call will transfer to speakerphone again.

DORMANT AUTOMATICALLY

To save power, Bluetooth® speaker will turn to dormant state automatically while disconnect Bluetooth® device after 10 minutes. Please activate it by turning it on.

HOW TO HANDLE CALLS FROM PHONE

Function	How to perform
Answer/end call	tap the answer/end button on your speakerphone to answer or end a call
Make a call	Call will automatically transfer to your speakerphone. If not, tap the answer/end button
Reject a call	Long press the answer/end call button to reject incoming call
Redial last number	Double tap the answer/end button when the speakerphone is on and not being used
Mute	Long press the volume Down button. A sound will indicate that the speakerphone is on mute every 10 seconds
Un-mute	Long press the volume Up button. A short sound will indicate that your speakerphone is un-muted
Adjust volume	Tap volume+ / volume- to adjust the volume level. A short sound will indicate when the volume level is at its highest or lowest limit.

FAQ

I hear crackling noises

Bluetooth® is sensitive to objects between the speakerphone and the connected device. It is designed for the speakerphone and the connected device to be used within 33 feet (10 metres) of each other, with no major objects in the way (walls, etc).

I cannot hear anything in my speakerphone

- Increase the volume in the speakerphone.
- Ensure speakerphone is paired to a working device.
- Make sure your phone is connected to the speaker phone by tapping the answer/end button.

I am having pairing problems?

You may have deleted your speakerphone pairing connection, try reconnecting.

Will the speakerphone work with other Bluetooth® equipment?

The speakerphone is designed to work with Bluetooth® mobile phones. It can also work with other Bluetooth® devices that are compliant with Bluetooth® version 1.1 or higher and support a headset, hands-free and/or advance audio distribution profile.

I can't use Reject call, call on hold, Redial or voice dialling

These features are depend on the ability of your phone to support a hands-free profile. The hands-free profile

which includes reject call, call hold and voice dialling are optional features which are not supported by all devices. Please consult your device manual for details.

I want to reset the pairing list in my speakerphone

The speakerphone registers a list of up to 8 mobile phones. To remove the list you need to reset the speakerphone to default setting by pressing together the 'Volume Down' and 'Volume Up' buttons for 6 seconds.

PRODUCT SPECIFICATIONS

Bluetooth specification & supported profiles	V4.0, Class 2, 10mtrs. HFP, HSP, A2DP
Frequency band	2.4Ghz to 2.48Ghz
Rechargeable battery	DC3.7V, 650mAH
AC/DC Charger	DC 5 to 6V, 400mA
Charge time	Up to 2.5hrs (approx)
Talk time	Up to 17hrs
Standby time	Up to 30 days (720hrs) approx.
Dimensions	H:119 x W:52 x D:16 mm
Weight	64 grams

Taking care of your speakerphone

- Always power off the speakerphone when not in use.
- Avoid storage at extreme temperatures (above 45°C/113°F - including direct sunlight - or below -10°C/14°F). This can shorten battery life and may affect operation. High temperatures may also degrade performance. Do not expose the speakerphone to rain or other liquids.

WARRANTY

To validate the warranty on this product. Please visit our website and click on the warranty button and enter your details www.streetwizeaccessories.com

SWBLUE6

Bluetooth® Multi-point Hands-Free Kit



PLEASE READ THESE INSTRUCTIONS BEFORE OPERATING AND KEEP FOR FUTURE USE.



Streetwize Accessories:

Unit 1, Royce Trading Estate, Ashburton Road West, Trafford Park, Manchester M17 1RY

Sales enquiries: sales@streetwizeaccessories.com

Technical enquiries: support@streetwizeaccessories.com

www.streetwizeaccessories.com